

Order # R800 8011 00



The Presenter™ is a simple but robust mixer that makes the audio setup for any event or presentation easy. A high quality microphone preamp with switchable phantom power allows any microphone to be connected, with dual tone controls and a low-cut filter to help optimize the sound of the mic in the room. XLR outputs are provided to feed a pair of powered PA speakers, with a ground lift switch to eliminate buzz and hum from ground loops. The Presenter is powered via USB, which also allows it to be connected to a laptop computer for high-quality digital audio playback. A program level knob provides control over the output from the laptop, and a 3.5mm input allows a smartphone or tablet to be connected as an alternate playback source.

Features

- XLR mic input with phantom power
- USB input to connect to a laptop computer
- 3.5mm TRS jack for the output of a phone
- Stereo XLR outputs to feed powered speakers

Applications

- Combine a microphone and laptop audio for any presentation
- Intuitive EQ and level controls for easy operation
- Eliminates complicated mixers & simplifies setup

Extras

- Low and High EQ controls for microphone
- Low Cut switch reduces low-end rumble
- Kensington slot to prevent theft
- Ground lift to eliminate buzz and hum

EQ – Low and High controls allow you to adjust the tone of the microphone.

Audio Program Level – Controls the level of the USB audio input and the 3.5mm input.

Low Cut – 3-position switch rolls off excessive low frequencies.

Mic Level – Gain control sets the microphone input level.

Kensington Slot – allows the Presenter to be secured with a Kensington Lock to prevent theft.

Power Indicator – Illuminates when the Presenter is receiving power via USB.


3.5mm Program Input – Mini 1/8" TRS input allows you to playback audio from a smartphone or tablet.



USB – Provides power for the Presenter and allows playback of high quality audio from a laptop.

Mic Input – Balanced XLR input to connect a microphone.

48V – Recessed switch engages phantom power for condenser microphones.

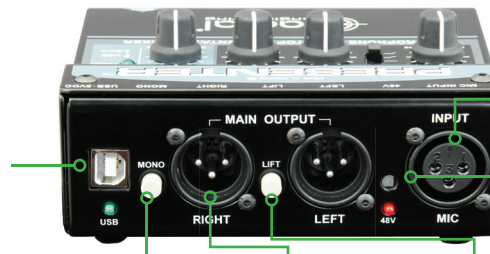

Mono – Sums the left and right outputs to mono.

Main Outputs – Balanced XLR line outputs connect directly to powered PA speakers.

Lift – Ground lift switch disconnects ground on pin-1 at the XLR outputs to remove buzz and hum.

Application

An XLR mic input allows you to connect a podium microphone and provide it with phantom power. The mic signal can then be adjusted using three EQ controls to tailor the frequency response. A program input level controls the volume of the USB input or the 3.5mm jack on the front of the unit, so you can connect the outputs of your laptop, smartphone, or MP3 player and blend it with the signal from the microphone. XLR outputs provide balanced feeds for a set of powered speakers, providing an all-in-one portable solution for any speaking engagement.

